



百强减速机®
BAI QIANG REDUCER
品质铸就品牌

YTC系列齿轮减速电机-TDY系列电动滚筒

江苏百强减速机有限公司

Jiangsu Baiqiang Reducer Co., Ltd.

地址：江苏省梁溪区蔚蓝路97号


24小时服务热线：400-710-9918

技术服务热线：13861467735



扫一扫加微信

YTC型齿轮减速电机

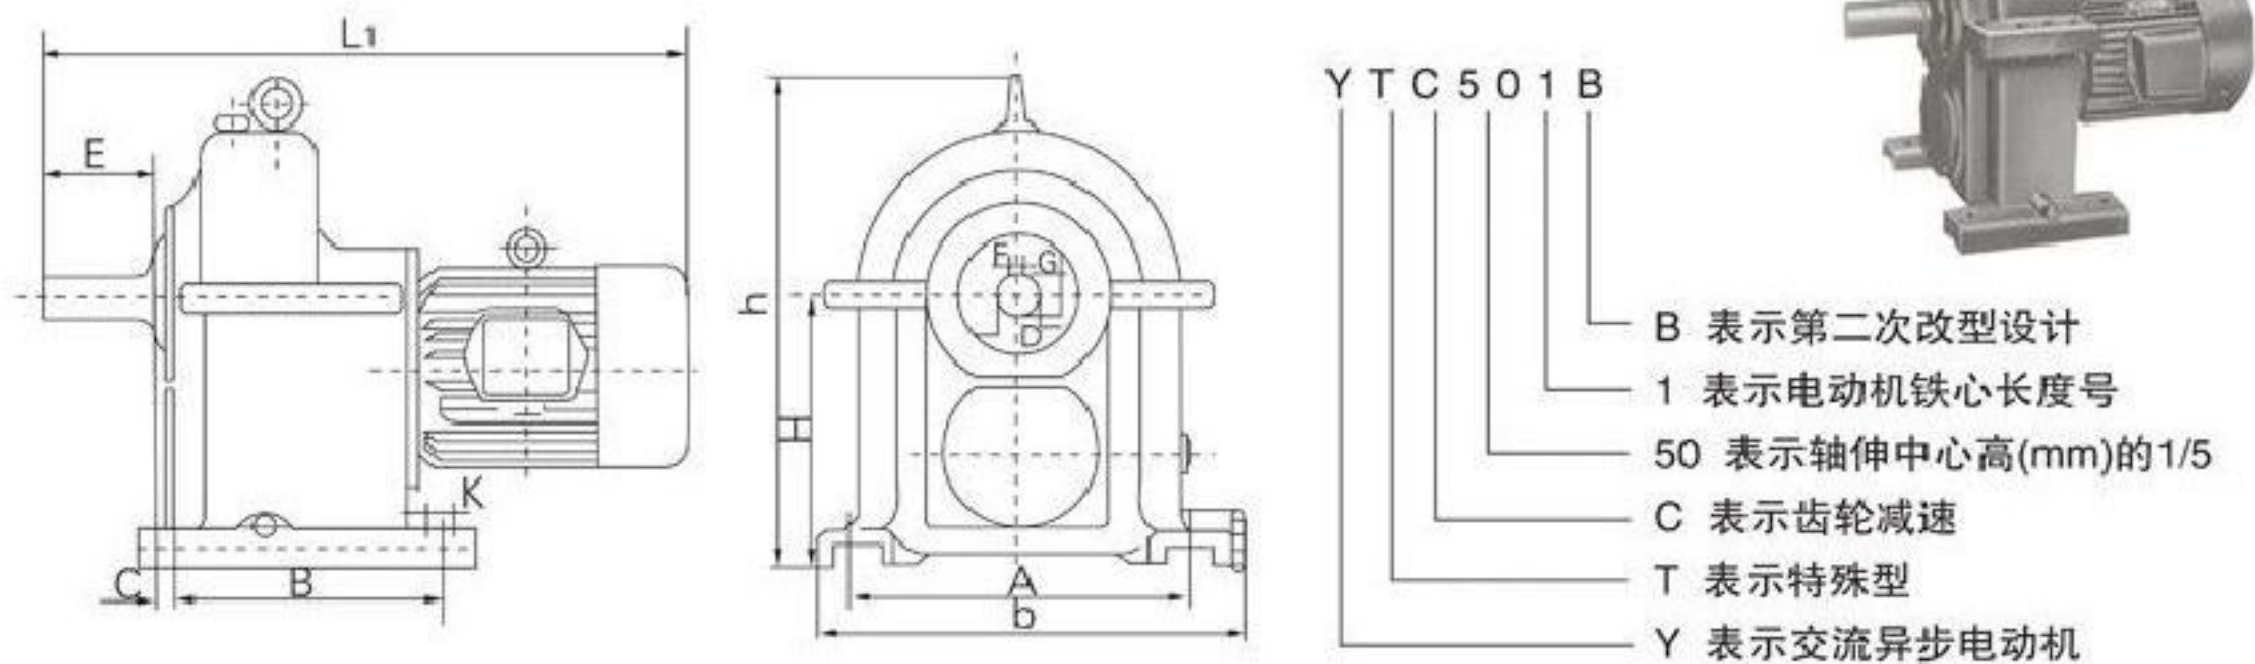

YTC型减速电机外形和安装尺寸

表1 (毫米)


型号	安 装 尺 寸									外 形 尺 寸		
	A	B	C	D	E	F	G	H	K	b	h	L1
YTC501	310	250	22	35	80	10	29.8	250	19	376	460	565
YTC502	310	250	22	35	80	10	29.8	250	19	376	460	590
YTC561	370	300	14	50	110	14	44.2	280	19	446	512	678
YTC562	370	300	14	50	110	14	44.2	280	19	446	512	720
YTC671	420	360	9	60	140	18	52.9	335	24	520	605	780
YTC672	420	360	9	60	140	18	52.9	335	24	520	605	830
YTC751	500	360	15	60	140	18	52.9	375	24	600	675	870
YTC752	500	360	15	60	140	18	52.9	375	24	600	675	870
YTC902	550	360	23	70	140	20	62.2	450	24	660	800	915
YTC903	550	360	23	70	140	20	62.2	450	24	660	800	960

YTC型减速电机技术参数

表2

型号	额定功率 (KW)	额定转速 (RPM)	额定电流 (A)	堵转电流	堵转转矩	最大转距	质 量 (最大) (kg)
				额定电流	额定转距	额定转距	
YTC 501 B	1.1	48.53.59.67.75.88.97.102.114.129.150.164.171.184.219.	2.7	6.5	2.2	2.2	80
YTC 502 B	1.1	31.35.39.44.	3.2	6	2	2	80
YTC 502 B	1.5	48.53.59.67.75.88.97.102.114.129.150.164.171.184.219.	3.7	6.5	2.2	2.2	85
YTC 561 B	1.5	31.35.39.44	4	6	2	2	120
YTC 561 B	2.2	48.53.59.67.75.88.97.102.114.129.150.164.171.184.219.	5	7	2.2	2.2	121
YTC 562 B	2.2	31.35.39.44.	5.6	6	2	2	130
YTC 562 B	2.8	48.53.59.67.75.88.97.102.114.129.150.164.171.184.219.	6.8	7	2.2	2.2	130
YTC 671 B	3.8	88.97.114.129.150.164.184.219.	8.8	7	2.2	2.2	210
YTC 672 B	5.2	88.97.114.129.150.164.184.219.	11.6	7	2.2	2.2	230
YTC 751 B	3.8	31.35.39.44	9.4	6.5	2	2	250
YTC 751 B	5.2	48.53.59.67.75.	11.6	7	2.2	2.2	245
YTC 752 B	5.2	31.35.39.44.	12.6	6.5	2	2	255
YTC 752 B	7	48.53.59.67.75.	15.4	7	2.2	2.2	255
YTC 902 B	7	31.35.39.41.44.	17	7	2	2	385
YTC 902 B	9.5	48.53.59.67.75.220.	22.6	6.5	2.2	2.2	385
YTC 903 B	9.5	31.35.39.41.44.	20.9	7	1.8	1.8	445
YTC 903 B	13.2	48.53.59.67.75.220.	27.4	7	1.8	1.8	445

TDY75 型油冷式电动滚筒

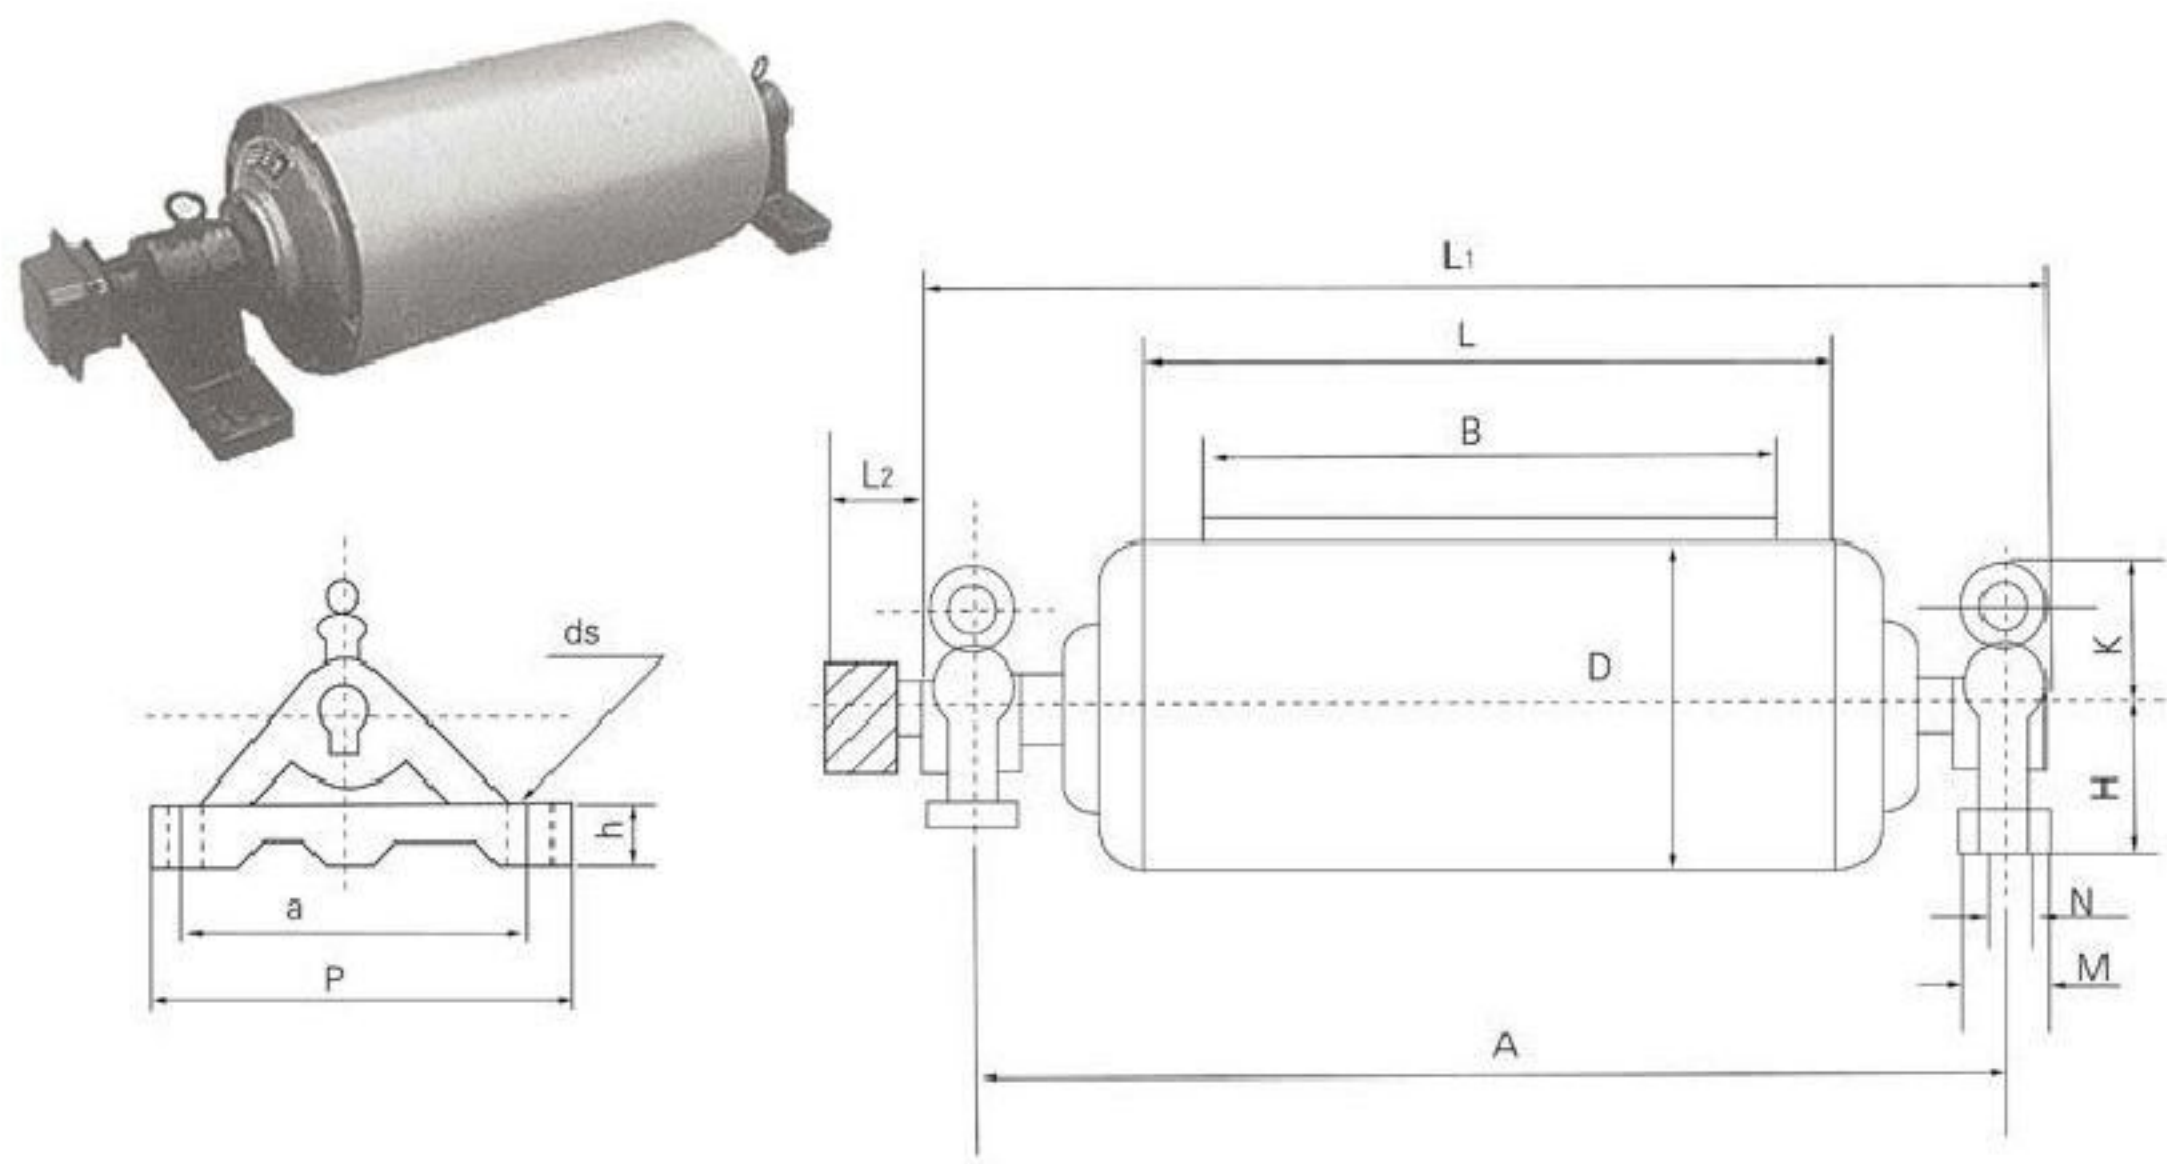

TDY75油冷式电动滚筒外形及安装尺寸表

表1 （毫米）

D	B	A	L	L ₁	L ₂	H	K	M	N	P	a	h	ds
320	500	850	600	940	95	120	105	90		340	280	35	27
	650	1000	750	1090		120		90		340	280	35	
400	500	850	600	940	95	120	125	90		340	280	35	
	650	1000	750	1090		120		90		340	280	35	
500	500	850	600	960	115	100	145	70		340	280	35	
			620										
	650	1000	750	1120		120		90		340	280	35	
	800	1300	950	1420		120		90		340	280	35	
630	650	1000	750	1120	115	120	175	90		340	280	35	
	800	1300	950	1430		140		130	80	400	330	35	
	1000	1500	1150	1630		140		130	80	400	330	35	
	12000	1750	1400	1880		160		160	90	440	360	50	34